


Submitted Model No.: _____

Specific Features: _____



▲ Designate Proper Finish Suffix

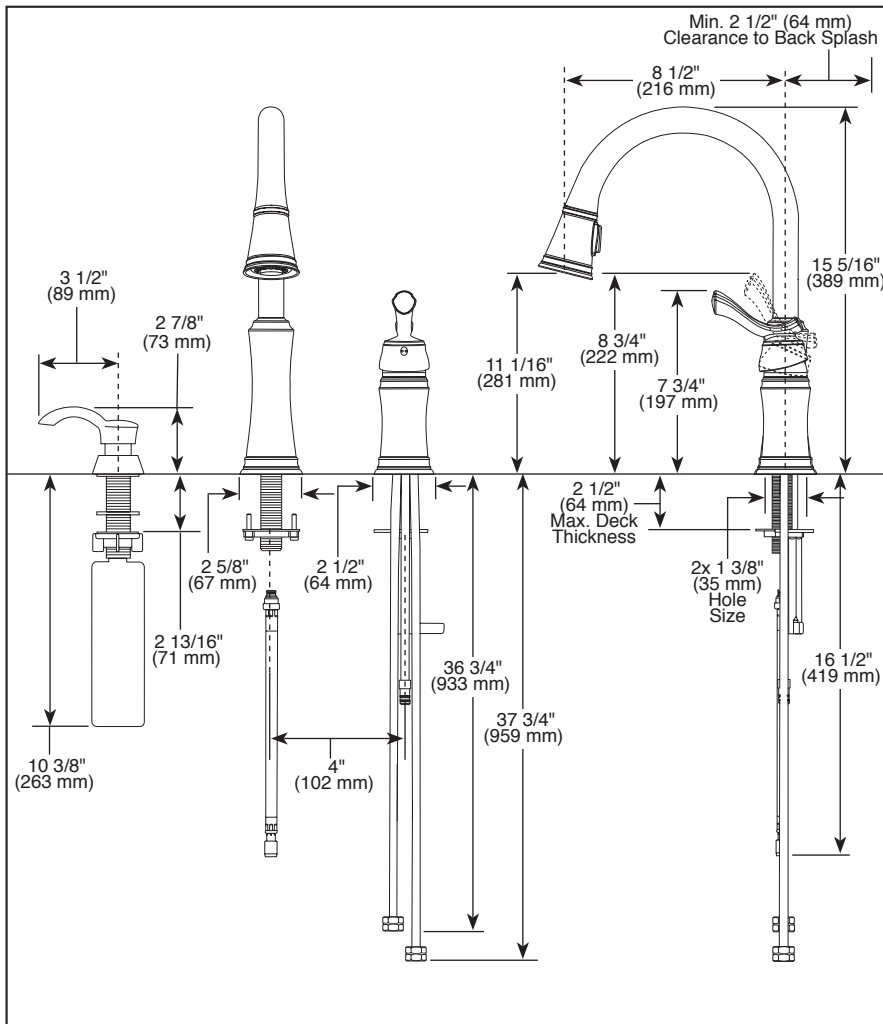

KITCHEN FAUCETS

- Lakeview® Collection
- Single Handle Widespread
- 2 or 3 Hole Sink Applications
- Optional Soap Dispenser
- DIAMOND Seal® Technology
- Integrated Supply Tubes
- MagnaTite® Docking System
- 2-Function Pull-Down

STANDARD SPECIFICATIONS:

- 15 5/16" (389 mm) high, 8 1/2" (216 mm) long, spout swings 360°.
- Control mechanism shall be the diamond coated ceramic cartridge.
- Touch-Clean® 2 function (stream/spray) sprayhead.
- Magnetic docking system secures sprayer to spout.
- 3/8" O.D. straight, staggered pex supply tubes - 36 3/4" (933 mm) and 37 3/4" (959 mm) long.
- Finished handle button with red/blue graphics to indicate hot/cold temperature.
- Integral double check valves in sprayer assembly.
- Recommended hole size 1 3/8" (35 mm) on 4" (102 mm) centers.
- Maximum 1.80 gpm @ 60 psi, 6.8 L/min @ 414 kPa

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

