



One-piece front-hinged door with 3 mm precision crafted stainless steel front door panel
Cushioned door opening and closing system
Diagonally positioned light sources for optimal interior lighting
Pyrolytic self-cleaning.
17 heating methods with core temperature probe, rotisserie spit and baking stone function
Automatic programmes
Core temperature probe with estimation of cooking time
Hot air fan rotates in both directions for ideal heat distribution.
TFT touch display
Panel-free appliance with control module behind glass
Electronic temperature control from 30 °C to 300 °C
Net volume 83 litres

Heating methods

Hot air.
Eco hot air.
Top + bottom heat.
Top + 1/3 bottom heat.
Top heat.
1/3 top + bottom heat.
Bottom heat.
Hot air + bottom heat.
Hot air + 1/3 bottom heat.
Full surface grill + circulated air.
Full surface grill.
Compact grill.
Baking stone function.
Roaster function.
Dough proofing.
Defrosting.
Keeping warm.

Handling

Rotary knob and TFT touch display operation.
Clear text display.
Option to save individual recipes (incl. core temperature probe).
Personalisation of automatic programmes.
Information key with use indicators.
Front-hinged door with 90° door opening angle.

Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.
Automatic programmes.
Rotisserie function.
Baking stone socket.
Actual temperature display.
Rapid heating.
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).
60 W halogen light on the top.
2 x 10 W halogen light on the side.
Enamelled side shelf supports with 3 tray levels, pyrolysis-safe.

Selected digital services (Gaggenau Home Connect)

Automatic programmes.
Remote control and monitoring.
Recipes.
Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

Characteristics

Gross weight
89.2
Built-in / Free-standing
Built-in
Integrated Cleaning system
Pyrolytic
Required niche size for installation (HxWxD)
475-475 x 860-860 x 560
Dimensions
480x890x550
Dimensions of the packed product (HxWxD)
660x1000x730
Control Panel Material
Stainless steel
Door Material
Stainless steel behind glass
Net weight
79.0
Usable volume of cavity
83
Heating modes:
Baking stone function, Bottom heat, Bottom heating, 1/3 top heat., Conventional heat, Defrost, Dough proving setting, Full width grill, Half width grill, Hot Air, Hot air and 1/1 bottom heating, Hot air and 1/3 bottom heating, Hot Air-Eco, Hot air grilling, Roaster function, Top heat, Top heating, 1/3 bottom heat., warming
Length electrical supply cord
Pull-out system
Accessory
Included accessories
1 x enamel baking tray,suit. pyrolytic clean, 1 x rotary spit, 1 x grill shelf, 1 x grill tub with grid, 1 x pluggable meat probe
Bake Element Wattages cavity 1
Broil Element Wattages cavity 1
3900
Convection Element Wattages cavity 1
1900
Drawer wattage
Energy efficiency class (2010/30/EC)
A
Energy consumption per cycle conventional - NEW (2010/30/EC)
1.32
Energy consumption gas oven per cycle conventional - NEW (2010/30/EC)
Energy consumption per cycle forced air convection - NEW (2010/30/EC)
0.86
Energy consumption gas oven per cycle forced air convection - NEW (2010/30/EC)
Energy efficiency index (2010/30/EC)
95.6
Connection Rating
5380
Fuse protection
25
Voltage
220-240
Frequency
50
Plug type
fixed connection (electrical connection by electrician), No plug (electrical connection by electrician)
Connecting cable type
Universal Product Code
Alternative colors available
Energy input
Electric
Length of electrical supply cord (in)
Required cutout/niche size for installation (in)
x
Dimensions of the packed product
25.98 x 39.37 x 28.74
Net weight
174.000
Gross weight
197.000

Consumption and connection features

2025-12-18

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Thermally insulated door with quintuple glazing.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Pyrolytic system.
Gaggenau enamel.
Heated catalyser to clean the oven air.


Planning notes

The door panel surface of the appliance extends 40 mm from the furniture cavity.
The outer edge of the door handle extends 90 mm from the furniture cavity.
For installation underneath cooktops: distance between the underside of the cooktop and the top edge of the oven housing: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/ electric connection) must be taken into account.
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.
The mains socket needs to be planned outside the built-in niche.
The LAN port can be found at the back on the upper left side.

Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Total connected load 5.4 KW.
Plan a connection cable.
Plan a LAN cable.
Power consumption standby/display on 0.7 W.
Power consumption standby/display off 0.5 W.
Power consumption standby/network 1.5 W.
Time auto-standby/display on 20 min.
Time auto-standby/display off 20 min.
Time auto-standby/network 20 min.
Please check the user manual for how to switch off the WiFi module.

GAGGENAU

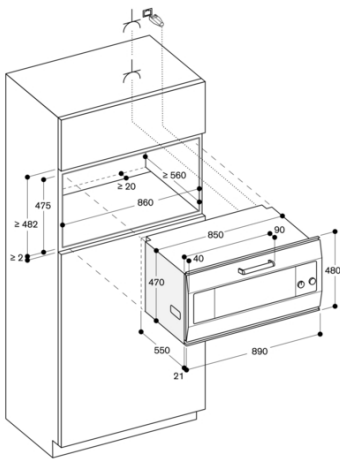

Socket
measurements in mm