

KMDA 7473 FL-U Silence

Induction hob with integrated vapour extraction
with Silence motor and 2 Flex zones for recirculation mode



- The quietest TwoInOne from Miele – Silence motor
- Flexible installation – Plug&Play or ducted recirculation mode
- Ample space – 4 large cooking zones incl. 2 Flex zones
- Automatic fan power regulation – Con@ctivity
- Compact control using the numerical display – ComfortSelect Plus

EAN: 4002516658139 / Material number: 12246280 /
Old Material Number: 26747379GB

General information	
Model identifier	KMDA 7473 FL-U Silence
Manufacturer material number	12246280
EAN number	4002516658139
Construction type	
Induction hob with integrated vapour extraction	•
Operating modes	
Recirculation air guided with optional accessories	DFK-xxxx, DUU 1500, DUU 600
Unguided recirculation air (Plug&Play installation)	•
Design	
Elegant glass ceramic surface	•
Frameless – surface-mounted	•
Ceramic surface colour	Black
Flush fit extractor	•
Flush	•
Colour of cover grille	Stainless steel
Cooking zone details	
Number of cooking zones	4
Number of cooking areas	2
Maximum number of pans	4
PowerFlex cooking zones	
No.	4
Type	Flex cooking zone
Size in mm	Ø 110-210
Max. rating in W	2100
Max. Booster power rating in W	3000
1st cooking zone/cooking area	
Position	Left
Type	Flex cooking area
Size in mm	210x420
Max. rating in W	3000
Max. Booster power rating in W	3700
2nd cooking zone/cooking area	
Position	right
Type	Flex cooking zone
Size in mm	210x420
Max. rating in W	3000
Max. Booster power rating in W	3700
User convenience	
Networking with Miele@home	•
Con@ctivity	•
Digital power level display	•
Operation via sensor controls	ComfortSelect Plus
Display colour	Yellow
Permanent pan recognition	•
Run-on time 5/15 min.	•
Active charcoal filter saturation indicator	•

KMDA 7473 FL-U Silence

Induction hob with integrated vapour extraction
with Silence motor and 2 Flex zones for recirculation mode



EAN: 4002516658139 / Material number: 12246280 /
Old Material Number: 26747379GB

Stop & Go function	•
Wipe protection	•
Recall function	•
Grease filter saturation indicator	•
Minute minder	•
Safety switch-off	•
Auto heat-up	•
Keeping warm	•
Individual setting options (e.g. buzzers)	•
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
ECO motor	•
Cleaning and care	
Easy to clean ceramic glass	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Recirculation	
Air throughput at min. level (m³/h) according to EN 61591	145
Air throughput at max. level (m³/h) according to EN 61591	465
Air throughput in Booster level 1 (m³/h) according to EN 61591	510
Sound power at min. level (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power at max. level (dB(A) re 1 pW) according to EN 60704-3	68.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	70.0
Sound pressure at min. level (dB(A) re 20 µPa) according to EN 60704-2-13	34.0
Sound pressure at max. level (dB(A) re 20 µPa) according to EN 60704-2-13	55.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
Safety	
Safety switch-off	•
Lock function	•
System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	800
Dimensions in mm (height)	200
Dimensions in mm (depth)	520
Casing height incl. connection box in mm	200
Cutout dimensions in mm (width) with surface-mounted installation	780 mm
Cutout dimensions in mm (depth) with surface-mounted installation	500 mm

KMDA 7473 FL-U Silence

Induction hob with integrated vapour extraction
with Silence motor and 2 Flex zones for recirculation mode





EAN: 4002516658139 / Material number: 12246280 /
Old Material Number: 26747379GB

Internal cutout dimensions in mm (width) with flush installation	780
Internal cutout dimensions in mm (depth) with flush installation	500
Weight in kg	15
External cutout dimensions in mm (width) with flush installation	804
External cutout dimensions in mm (depth) with flush installation	524
Total rated load in kW	7.50
Voltage in V	230
Frequency in Hz	50-60
Length of supply lead in m	1.6
Accessories included	
Mains cable	Yes
Active charcoal filter DKF 35-P	•
Plug&Play adapter	•

KMDA 7473 FL-U Silence

Induction hob with integrated vapour extraction
with Silence motor and 2 Flex zones for recirculation mode

	Abluftbetrieb	Geführter Umluftbetrieb	Plug&Play-Betrieb
KMDA 7473 FR-A	✓	–	–
KMDA 7473 FR-U	–	✓	✓✓
KMDA 7473 FL-A	✓	–	–
KMDA 7473 FL-U	–	✓	✓✓

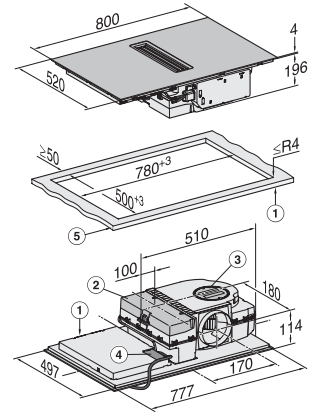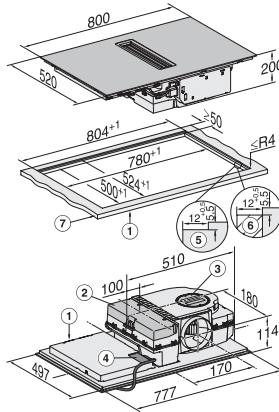

KMDA7473FL/FR – Operating options




☐☐ Possible, ☐ Possible – further accessories necessary, – Programming must be changed – further accessories necessary

KMDA7272-1FL, KMDA7272FL, KMDA7473FL, KMDA7473-1FL – flush

1) Front, 2) removable drip tray, 3) cleaning flap, 4) Mains connection box with mains connection cable, L = 1600 mm, 5) Step milling natural stone worktop, 6) Wooden strip 12 mm (not included in delivery), 7) Worktop thickness, Exhaust air and guided recirculation mode: ≥10 mm, Plug&play operation: ≥10 mm – ≤40 mm

KMDA7272-1FL, KMDA7272FL, KMDA7473FL, KMDA7473-1FL

1) Front, 2) Removable drip tray, 3) Cleaning flap, 4) Mains connection box with mains connection cable, L = 1600 mm, 5) Worktop thickness, Exhaust air and guided recirculation mode: ≥10 mm, Plug&Play operation: ≥10 mm – ≤40 mm

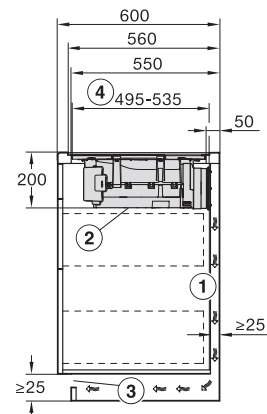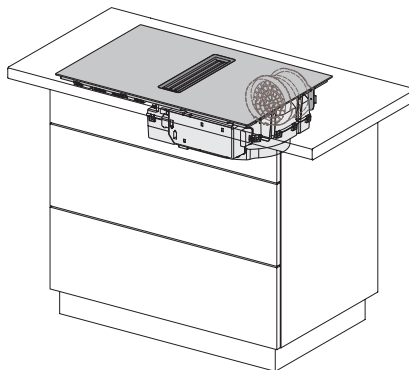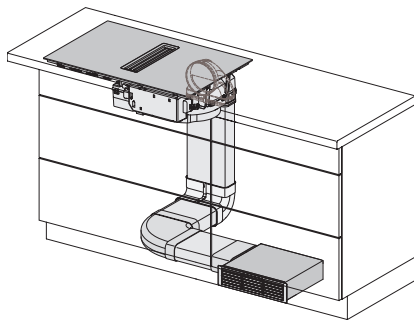


KMDA7272-1FL/FR, KMDA7473-1FL/FR, KMDA7272FL/FR, KMDA7473FL/FR, Air circulation

KMDA7272-1FL/FR, KMDA7473-1FL/FR, KMDA7272FL/FR, KMDA7473FL/FR, Plug&Play

KMDA7272-1FL, KMDA7473-1FL, KMDA7272FL, KMDA7473FL – Side view flush, Plug&Play

☐ When routing the exhaust air between the cabinet wall and an adjacent room wall or an adjacent piece of furniture, a minimum distance of 25 mm must be observed., ☐ The removable collection tray and the cleaning flap must be accessible after installation., ☐ The cross-section of the ventilation opening must be at least 425 cm²., ☐ Distance from the front of the lower box to the end of the plug & play adapter

Induction hob with integrated vapour extraction
with Silence motor and 2 Flex zones for recirculation mode



KMDA7272-1FL, KMDA7473-1FL, KMDA7272FL,
KMDA7473FL – Side view flush+X, Plug&Play

KMDA7272-1FL, KMDA7473-1FL, KMDA7272FL,
KMDA7473FL – Side view lying on top+X, Plug&Play

A detailed diagram of the 3D printer assembly. It shows the printer head (1) mounted on a vertical support (2). The extruder (3) is located on the side of the head. The filament spool holder (4) is attached to the bottom of the support. The diagram is labeled with numbers 1 through 4, corresponding to the parts listed in the table.


1) DFK-AK 90. 2) DFK-R 1000

1) DFK-AK 90. 2) DFK-R 1000. 3) DFK-BV 90

1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-BH 90


KMDA 7473 FL-U Silence

Induction hob with integrated vapour extraction
with Silence motor and 2 Flex zones for recirculation mode

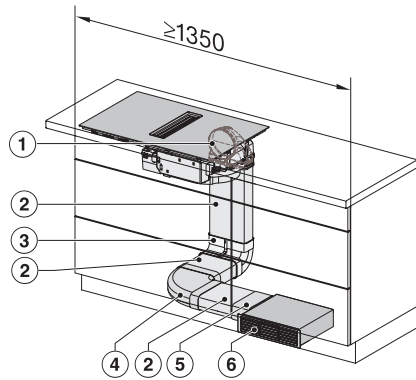


KMDA7272-1FL/FR, KMDA7473-1FL/FR, KMDA7272FL/FR, KMDA7473FL/FR – Installation variant 4 Circulating air

1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-BH 90, 5) DFK-V, 6) DUU 1500, , The minimum width of the cabinet is 1350 mm.

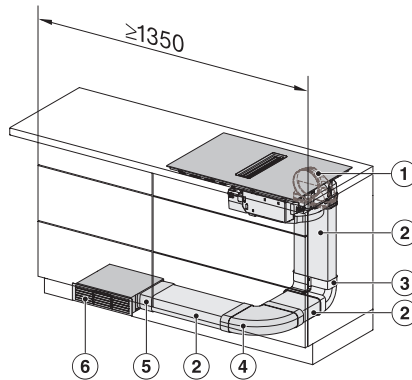


KMDA7272-1FL/FR, KMDA7473-1FL/FR, KMDA7272FL/FR, KMDA7473FL/FR – Installation variant 5 Circulating air

1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-BH 90, 5) DFK-V, 6) DUU 1500, , The minimum width of the cabinet is 1350 mm.

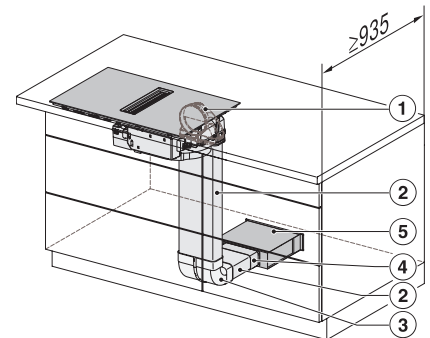


KMDA7272-1FL/FR, KMDA7473-1FL/FR, KMDA7272FL/FR, KMDA7473FL/FR – Installation variant 6 Circulating air

1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-V, 5) DUU 1500, , The minimum depth of the cabinet is 935 mm.

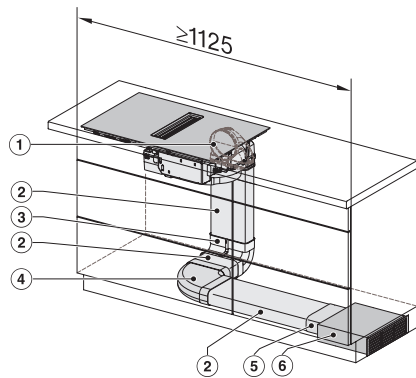


KMDA7272-1FL/FR, KMDA7473-1FL/FR, KMDA7272FL/FR, KMDA7473FL/FR – Installation variant 13 Circulating air

1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-BH 90, 5) DFK-V, 6) DUU 1500, , The minimum width of the cabinet is 1125 mm.

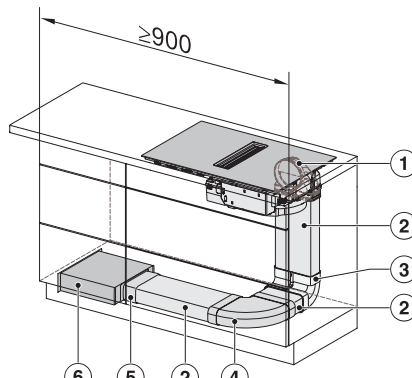


KMDA7272-1FL/FR, KMDA7473-1FL/FR, KMDA7272FL/FR, KMDA7473FL/FR – Installation variant 14 Circulating air


1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-BH 90, 5) DFK-V, 6) DUU 1500, , The minimum width of the cabinet is 900 mm.

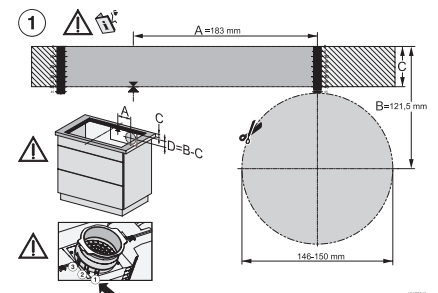


KMDA7272FL, KMDA7473FL – flush installation, drilling template, Installation depth 20 cm

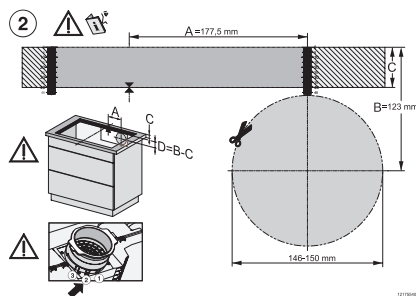

KMDA7272FL/FR, KMDA7473FL/FR – surface installation, drilling template

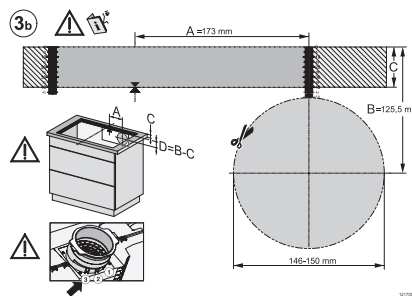

KMDA7272FL, KMDA7473FL – flush installation, drilling template, Installation depth 21 cm

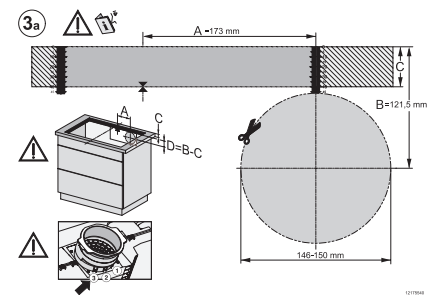

KMDA7272FL/FR, KMDA7473FL/FR – surface installation, 21 cm, drilling template