


KM 7897 FL

Induction hob with onset controls

with a width of 936 mm and full-surface induction for maximum flexibility

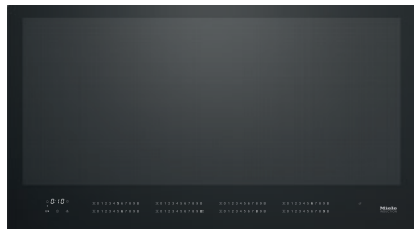

- Intuitive quick selection via numerical displays – SmartSelect White
- Intelligent pan recognition – for up to 6 pans
- Frameless for flush-fit or surface-mounted installation
- Cookware is moved around particularly quietly – SilentMove
- Communication with the cooker hood – automatic Con@ctivity function


EAN: 4002516148838 / Material number: 11144110 / Old Material Number: 26789770GB

General information	
Model identifier	KM 7897 FL
Manufacturer material number	11144110
EAN number	4002516148838
Marketing class	Diamond
Heating type	
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Graphite black
Print design	SilentMove
Flush	•
Surface-mounted installation	•
Cooking zone details	
Number of cooking areas	1
Maximum number of pans	6
1st cooking zone/cooking area	
Position	Can be selected freely
Type	Full area
Size in mm	870x380
Max. rating in W	2600
Max. Booster power rating in W	3300
Max. TwinBooster power rating in W	3650
User convenience	
Networking with Miele@home	•
Con@ctivity	•
Pan and pan size recognition	•
Operation via sensor controls	SmartSelect White
Display colour	White
Intelligent pan recognition	•
Positioning aid	•
Stop & Go function	•
Wipe protection	•
Recall function	•
Minute minder	•
Safety switch-off	•
Auto heat-up	•
Keeping warm	•
Individual setting options (e.g. buzzers)	•
Efficiency	
Power rating in off mode in W	0.5
Power rating in standby mode in W	0.8
Power rating in networked standby in W	2.0
Time until automatic switch to off mode in min	10
Time until automatic switch to standby in min	10
Time until automatic switch to networked standby in min	10

KM 7897 FL

Induction hob with onset controls

with a width of 936 mm and full-surface induction for maximum flexibility

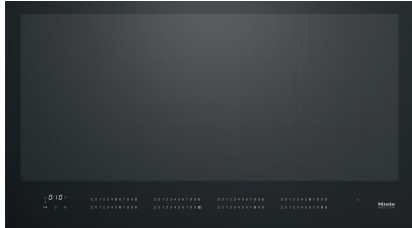

EAN: 4002516148838 / Material number: 11144110 / Old Material Number: 26789770GB

Cleaning and care

Easy to clean ceramic glass

•

Safety

Safety switch-off

•

Lock function

•

System lock

•

Integrated cooling fan

•

Overheating protection

•

Residual heat indicator

•

Technical data

Dimensions in mm (width)

936

Dimensions in mm (height)

51

Dimensions in mm (depth)

520

Casing height incl. connection box in mm

51

Cutout dimensions in mm (width) with surface-mounted installation

916 mm

Cutout dimensions in mm (depth) with surface-mounted installation

500 mm

Internal cutout dimensions in mm (width) with flush installation

916

Internal cutout dimensions in mm (depth) with flush installation

500

Weight in kg

21

External cutout dimensions in mm (width) with flush installation

940

External cutout dimensions in mm (depth) with flush installation

524

Total rated load in kW

11.00

Length of supply lead in m

1.4

Voltage in V

230

Frequency in Hz

50-60

Accessories included


Mains cable

Yes

KM 7897 FL


Induction hob with onset controls

with a width of 936 mm and full-surface induction for maximum flexibility

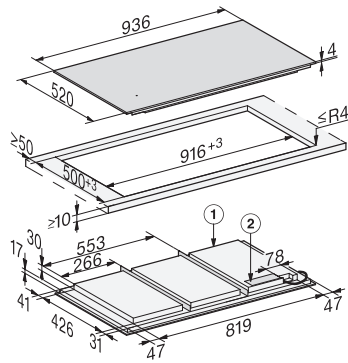

KM7697FL, KM7897FL, KM7897-1FLDiamond, KM7897-2FL Diamond (installation drawings) – onset

1) Front, 2) Mains connection box with mains connection cable, L = 1440 mm, are enclosed loosely,



KM7697FL, KM7897FL, KM7897-1FLDiamond, KM7897-2FL Diamond (installation drawings) – flush-fit

1) Front, 2) Mains connection box with mains connection cable, L = 1440 mm, are enclosed loosely, 3) Stepped cut-out natural stone worktop, 4) Wood support 12 mm (not supplied)