

ICBIR36550/S/T



FEATURES

The scratch-resistant, ceramic glass induction cooking surface provides consistent, precise temperature control and nearly instantaneous temperature adjustment response

Wolf's Dual VertiFlow™ convection system provides reliably even heat, reduces hot and cold spots, and enables consistent multi-rack cooking

Gourmet Mode features nearly 50 presets that automatically control the oven to ensure delicious results

Take the guesswork out of cooking with 10 chef-created cooking modes, including Bake, Broil, Convection, Convection Roast, Dehydrate, Gourmet, Proof, Roast, Stone, and Warm

The sleek rangetop features a striking interactive display. The full-color touchscreen is intuitive, easy to read, and locks for safety and cleaning

Boost Mode delivers rapid heat for 40% faster boil times

The Bridge function joins two induction zones into one large area, enabling use of an induction-capable griddle, open roaster, or fish poacher

Cleaning is simple. The smooth ceramic glass surface resists impact, scratching, and staining, and wipes clean easily

The oven offers self-clean, delayed start, timed cook, and Sabbath features

The temperature probe alerts you when your dish has reached the desired temperature

The range's stainless steel construction and clean lines coordinate elegantly with a full suite of transitional style Sub-Zero and Wolf appliances

ACCESSORIES

36" Multifunction Pan

76 cm Grill Pan

91 cm Dehydration Rack Set

91 cm Full-extension ball-bearing oven rack

91 cm Standard Oven Rack


Bake Stone Kit

Temperature Probe

Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



TOP CONFIGURATION

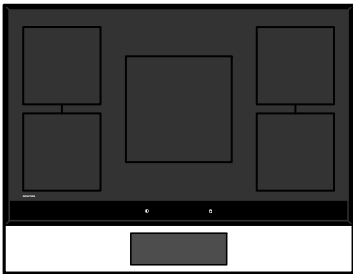

COOKTOP SPECIFICATIONS

- 4 - 2,100 W Zones with 3,700 W Boost
- 1 - 279 mm 2,600 W Zone with 3,700 W Boost



PRODUCT SPECIFICATIONS

Model	ICBIR36550/S/T
Dimensions	911mmW x 902mmH x 718mmD
Oven 1 Interior Dimensions	794mmW x 444mmH x 508mmD
Oven 1 Usable Capacity	178 L
Oven 1 Overall Capacity	155 L
Door Clearance	533mm
Weight	201 kg
Electrical Supply	Refer to Design Guide and Installation Guide for electrical requirements

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

